


Coffee

FEATURES • BENEFITS

Meets espresso, coffee, and tea standards; known to significantly reduce

Proprietary Fibredyne™ II filtration media effectively inhibits growth of bacteria on the filter media that can decrease product life. Also can reduce


floor stand bracket



High flow 1/2" OD tubing optimized water

tubing, fittings, and mounting hardware for installation

High efficiency RO membrane saves up

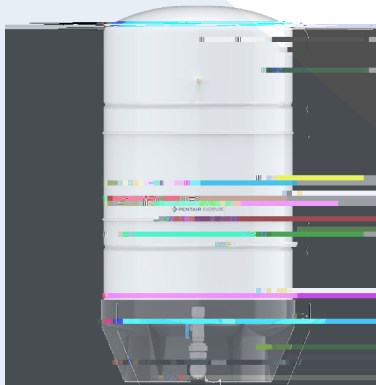

technology and other aspects of the

Pressure gauge allows monitoring of RO inlet pressure and prefilter condition

Flush valves speed up installation and

INSTALLATION TIPS

*Not performance tested or certified by NSF.

Allow 3" clearance below system for filter

(26.6°C) can be used.

Do not exceed system text exceed

RO systems with 25% recovery.
EPA Est. 002623-IL-003



United States | " J aU | A' Uo | "9%l o; UZ%A ;E' | " | " | "g' PEÄU | " J %E' | sY; o; ÚkáÚ | x; EäU; sÍ Ç | "í l cY; Ú; s; x; EäU; sÍ Ç

Australia | " J l E% ' Uo; | " %c; Eí E±' l aa' p; | " " aYaU; %o; | " | " | " d; Ä; | %o; | o; ÚkáÚ | x; EäU; sÍ Ç

China | " 5" Á ac' ZÄ%o; dKP' | " | " %±' %o; | " | China | " | " | " d; Ä; | s' %E% %o; Ú | x; EäU; sÍ Ç

India | " l áÄ' o; Ä' | " | " | " a' 5Ä l U' d; l o; Ú | " | " | " sá U' | " | " Kí %o; | " | " | " d; Ä; | %E% %o; aYá Ç | Ú | x; EäU; sÍ Ç

Europe | " Z; EäU; q; %o; Ú | " | " | " Ä' p; | " | " EäYaU; | " | " Äq l ÄYa; | " | " | " Äí Ç YaU; | " | " | " 9; Ú EäU; | " | " | " Ä' p; | " | " | " d; Ä; | Y%Ä Y' | o; ÚkáÚ | " | " | " áU' x; l sÍ Ç

Japan | " | " C% %o; | " | " | " Es' | " | " 9% | " | " C l ä' J K l Ä±' | " | " 5 | " | " 9% | " | " C l ä' J | " | " U l Ää' | " | " %o; | " | " 1% | " | " 1% | " | " D% %o; %o; | " | " | " C% %o; | " | " | " d; Ä; | %E' | " | " | " o; ÚkáÚ | " | " | " sÍ Ä

Southeast Asia | " | " 9% | " | " Ä sÄ | " | " | " | " D± Y' | " | " | " EäU; | " | " | " %±% d' Ú | " | " | " | " d; Ä; | " | " sY; o; ÚkáÚ | " | " | " x | " | " | " A